



CE
EN 998 - 1

ELASTOTEX ACRYLIC

ELASTIC INDOOR AND OUTDOOR USE
DECORATIVE COATING

DEC/25 | DECORATIVE COATINGS

DESCRIPTION

ELASTOTEX ACRYLIC is a textured acrylic resin-based coating suitable for both indoor and outdoor use. It is easy to apply, and it can be applied on painted surfaces, plasterboards, on FF and any plastered surface providing an attractive finish. It has high resistance to extreme weather conditions and to UV sun radiation. Due to its high elasticity it does not create capillary cracks.

COVERAGE

0,5-1kg/m²

STORAGE

Up to 12 months in sealed containers protected from direct sunlight and low temperatures.


Attention: colour and general technical characteristics may vary slightly due to the substrate or by not following the manufacturer's directions for use. Technical specifications may vary slightly between product batches.

DIRECTIONS FOR USE

- Surfaces where ELASTOTEX ACRYLIC will be applied must be free from dust and dirt.
- The surface must necessarily be treated with 1 coat of NEOCHROM's RENOV (in the same colour as ELASTOTEX ACRYLIC) diluted at 1:1.
- The coat is applied with a specialty machine or air-brush.
- Allow to dry completely, and apply ELASTOTEX ACRYLIC without dilution, trying to give the surface a textured result.
- Apply with roller.

TECHNICAL SPECIFICATIONS

Form:	Thick paste
Colour:	White. a large range of made to order colours
Temperature during application:	From +5°C to +35°C
Temperature resistance:	From -10°C to +80°C
Drying time:	48 hours to reach final hardness
High elasticity	✓

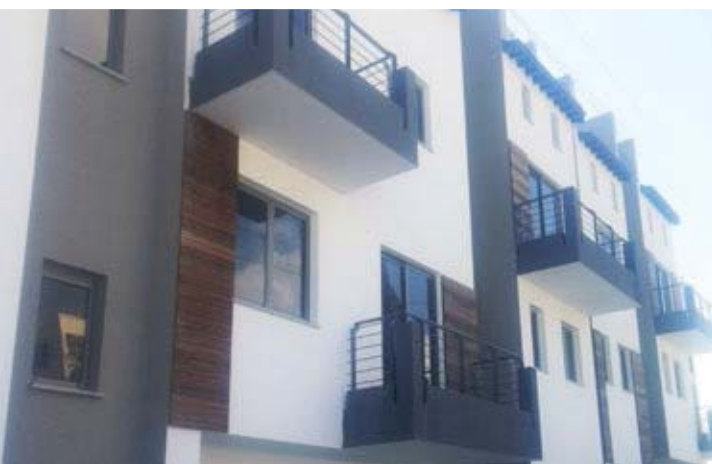

PACKAGING:

3.5, 7 AND 14KG PLASTIC CONTAINERS

